

Stainless Steel Door Protection Barrier


Part Number DP15

Features

This narrow hoop style barrier is often specified where space is limited.

Commercial heavy-duty specification made from 50.8 mm diameter tube with a strong 2mm wall thickness.

Fine satin brushed finish to Ra.5 as standard.

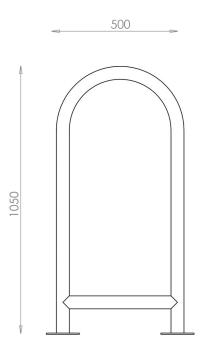

Fixings required

For bolt-down type, use 10mm diameter anchor bolts. 6 no are required per barrier, which can be supplied at extra cost.

Simbars UK Ltd.

46 Ashton Vale Rd, Bristol, BS3 2HQ tel: 0117 953 1444

email: martin@simbars.co.uk

www.simbars.co.uk



Options

- · Manufactured as surface mount bolt down or root fix version for embedding in concrete.
- · Stainless steel grade 304 or 316.
- · DDA compliant Black Rilsan® nylon dip coated or powder coating to any RAL colour.
- Any width or height can be produced.
- Mountings for door actuation control gear can be added.
- · Door buffers can be fitted.
- Robust automatic door catch with integral buffer (please see our separate information details).
- · Reflective tape can be applied.