

## Demountable Actuation Bollard

(Part No: DP22)

Suitable for the fitting of a larco push pad SAP 2020 with SAP2080 Protection ring, Supplied by **RTR Services Ltd.**


Bollard diameter 129mm x 950mm high.  
Mounted to a precision machined socket base.

Manufactured in stainless steel grade 304 or 316.  
Satin brushed finish (Ra.5 maximum roughness).

Simply slide over the base socket and fix with  
4 qty M5 machine screws.  
Socket bases can be root fixed or surface mount style  
(shown below).  
Surface mount style to be fixed with 4 qty M10 anchor bolts.

Option of base plate embellisher ring.

All socket bases have a cable entry hole.  
Bollards have a built-in tray to support a battery.

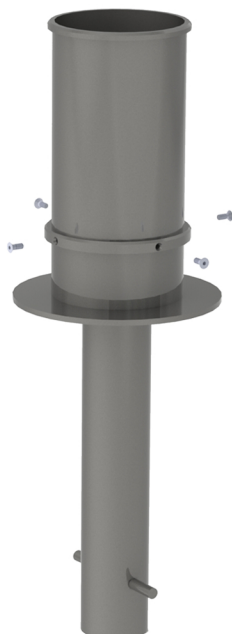

### Simbars UK Ltd.

46 Ashton Vale Rd,

Bristol,

BS3 2HQ

tel: 0117 953 1444

email: [info@simbars.co.uk](mailto:info@simbars.co.uk)

[www.simbars.co.uk](http://www.simbars.co.uk)