

DOOR BARRIER


Part Number DP23

Features

A popular style of door barrier which incorporates a rubber door stop buffer.

Constructed using 48mm diameter mandrel bent steel tube
Hot dip galvanized after manufacture to BS EN ISO 1461 standard.

Complete with rubber door stop buffer.

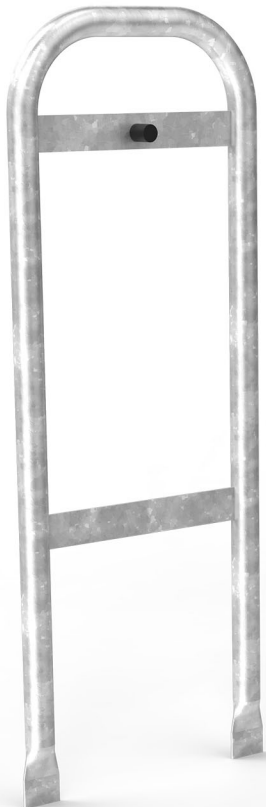

Options

Stainless steel versions in grade 304 and 316.

DDA compliant Black Rilsan nylon dip coated or powder coating to any RAL colour.


Any width or height can be produced.

Fully welded base plates or root fix embedded versions are available.

Reflective tape can be applied to tube uprights.

Fixings required

For bolt down type use 12mm diameter anchor bolts, 4 no are required per barrier which can be supplied at extra cost.

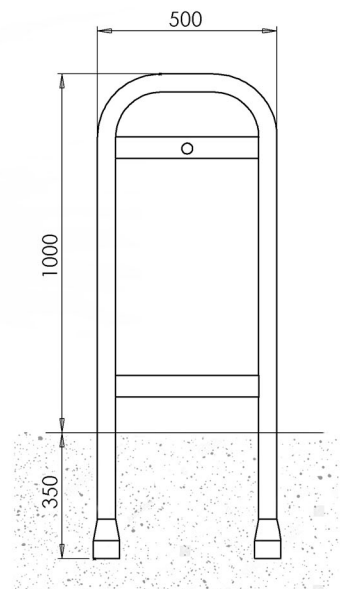

Simbars UK Ltd.

46 Ashton Vale Rd,
Bristol,
BS3 2HQ

tel: 0117 953 1444

email: martin@simbars.co.uk

www.simbars.co.uk