

Perforated Door Barrier

Part Number DP24

Features

These popular door barriers are fitted with custom, laser cut metal perforated panels.


Fully compliant to BS EN ISO 16005:2012

Constructed using 48mm diameter mandrel bent steel tube

Hot dip galvanized after manufacture to BS EN ISO 1461 standard

Perforated aluminium panel

This design prevents cycle locking ensuring doorways remain clear.

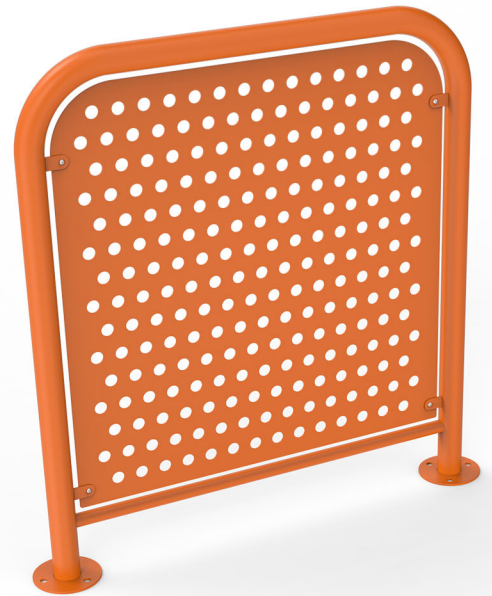

Options

Infill panel, can be plain or perforated.

Stainless steel options in grade 304 and 316.

DDA compliant Black Rilsan nylon dip coated or powder coating to any RAL colour.

Any width or height can be produced.

Mountings for door actuation control gear can be added.

Door buffers can be fitted.




Robust automatic door catch with integral buffer (please see our separate information details).

Fully welded base plates or root fix embedded versions are available

Reflective tape applied to tube and or panel.

Fixings required

For bolt down type use 10mm diameter anchor bolts, 6 no are required per barrier which can be supplied at extra cost.

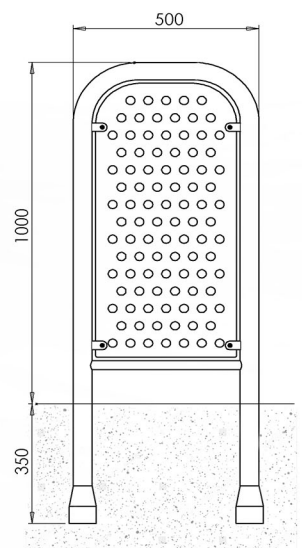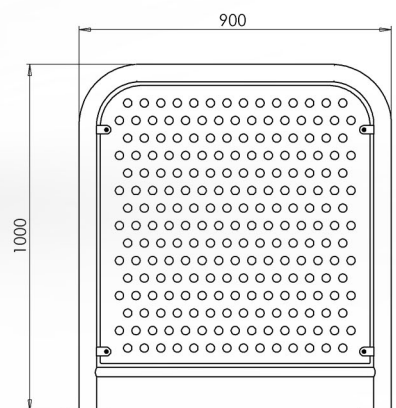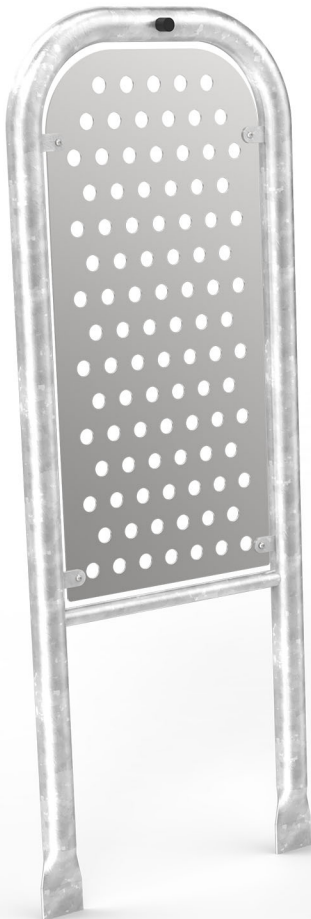

Simbars UK Ltd.

46 Ashton Vale Rd,
Bristol,
BS3 2HQ

tel: 0117 953 1444

email: martin@simbars.co.uk

www.simbars.co.uk