

Bolt Down Service Yard Bollard


Part Number ST100

Features

Constructed from heavy wall steel tube.

Galvanized and powder coated complete with reflective bands.

Base plated version allows fixing with standard ground anchor bolts.

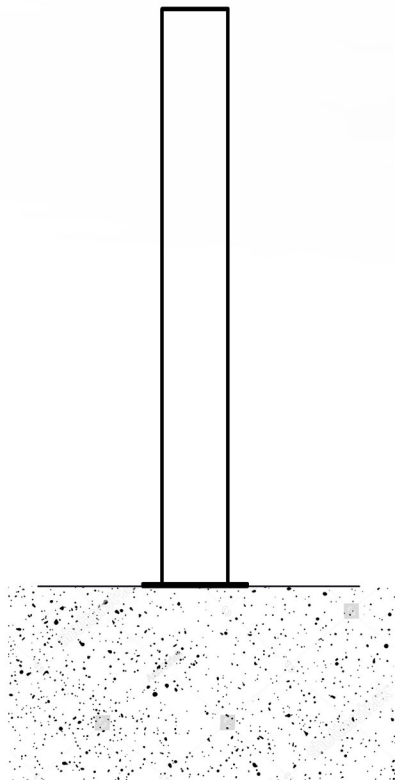

Fixings required

M16 diameter anchor bolts. 4 no are required per bollard. These can be supplied at extra cost.

Options

- Most diameters and heights can be produced.
- Root fix embedded versions are also available.
- Open top for concrete site filling.
- Loose cap for fitting after concrete filling.

Simbars UK Ltd.

46 Ashton Vale Rd,

Bristol,

BS3 2HQ

tel: 0117 953 1444

email: martin@simbars.co.uk

www.simbars.co.uk